

MINIFLEX SANDER




The MiniFlex Sander is a strong electrically powered handtool. It was developed as an alternative to other industrial hand sanders and is used for sanding of flat items and items with profiles and edges.

The speed is adjustable, which ensures optimal sanding results and a longer lifetime of sanding materials.

The MiniFlex Sander can be mounted with different types of sanding heads:

Disc heads: Ø125 and Ø180

Traditional head: Ø100, Ø120 and Ø180 - up to length 100 mm.

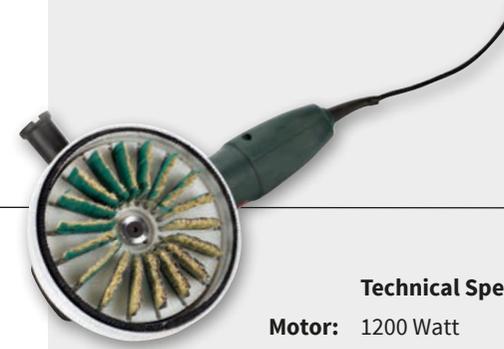

Technical Specifications:

Motor: 1200 Watt

RPM: 700-2200 RPM

Electricity: 230V, 50/60Hz, 5.5Amp

Weight: 3.1 kg Machine without tools

FLEXSANDER 50



FlexSander 50 is a hand machine developed by Flex Trim and an alternative to existing industrial hand sanders. It is useful for sanding of both flat items and items with profiles and edges of a 5-10 mm radius.

The pneumatic FlexSander 50 has adjustable speed settings. Controlling the speed not only extends the life of the sanding media, but also ensures a better sanding result.

The machine is mounted with a dust hood, which can be attached to any kind of vacuum system.

FlexSander 50 is very easy to use and does not vibrate, which means no aching arms, shoulders and wrists for the operator.

FlexSander 50 can be mounted with different types of sanding heads:

Disc heads: Ø125 and Ø180

Traditional head: Ø100, Ø120 and Ø180 - up to length 100 mm.

Technical Specifications:

Motor: 1 x 0.33 kW

RPM: 250-2000 RPM

Dust extraction:

Disc head: Disc Ø50 hole

Traditional Ø40 hole

Weight: 1.4 kg Machine without tools

FLEXSANDER 60



FlexSander 60 is an industrial brush sanding machine developed by Flex Trim and is a powerful alternative to existing hand sanders.

It is useful for sanding of both flat items and items with profiles and edges of a 5-10 mm radius.

The speed is fixed at ~600 RPM , which is optimal for sanding with Flex Trim sanding brushes both for getting optimal sanding results and long lifetime of the brushes.

The machine is mounted with a dust hood that can be attached to any kind of vacuum system.

FlexSander 60 is very easy to use and does not vibrate, which means no aching arms, shoulders and wrists for the operator.

FlexSander 60 can be mounted with different types of sanding heads:

Disc heads: Ø125 and 180 mm.

Traditional head: Ø100, Ø120 or Ø180 – length up to 100 mm.

Technical Specifications:

Motor: 1 x 0.33 kW

RPM: 600 RPM

Dust extraction:

Disc head: Disc Ø50 hole

Traditional Ø40 hole

Weight: 1.8 kg Machine without tools

